

Yung-Chun Chang<sup>1</sup>, Yu-Lun Hsieh<sup>2</sup>, and Wen-Lian Hsu<sup>2</sup>


<sup>1</sup> Graduate Institute of Data Science, Taipei Medical University, Taipei, Taiwan

<sup>2</sup> Institute of Information Science, Academia Sinica, Taipei, Taiwan


<sup>1</sup> changyc@tmu.edu.tw, <sup>2</sup> {morphie, hsu}@iis.sinica.edu.tw

## Introduction

Short text conversation (STC) has emerged as a prominent research topic and gained considerable attention in recent years. The NTCIR-13 STC-2 Task provides a transparent platform to compare Retrieval-based model (RBM) and Generation-based model (GBM). In this task, we proposed a retrieval-based method with **distributed vector representation**, and a generation-based method with **recurrent neural networks**. We also proposed a **data augmentation** method for extending the amount of labeled data for training a generative model.

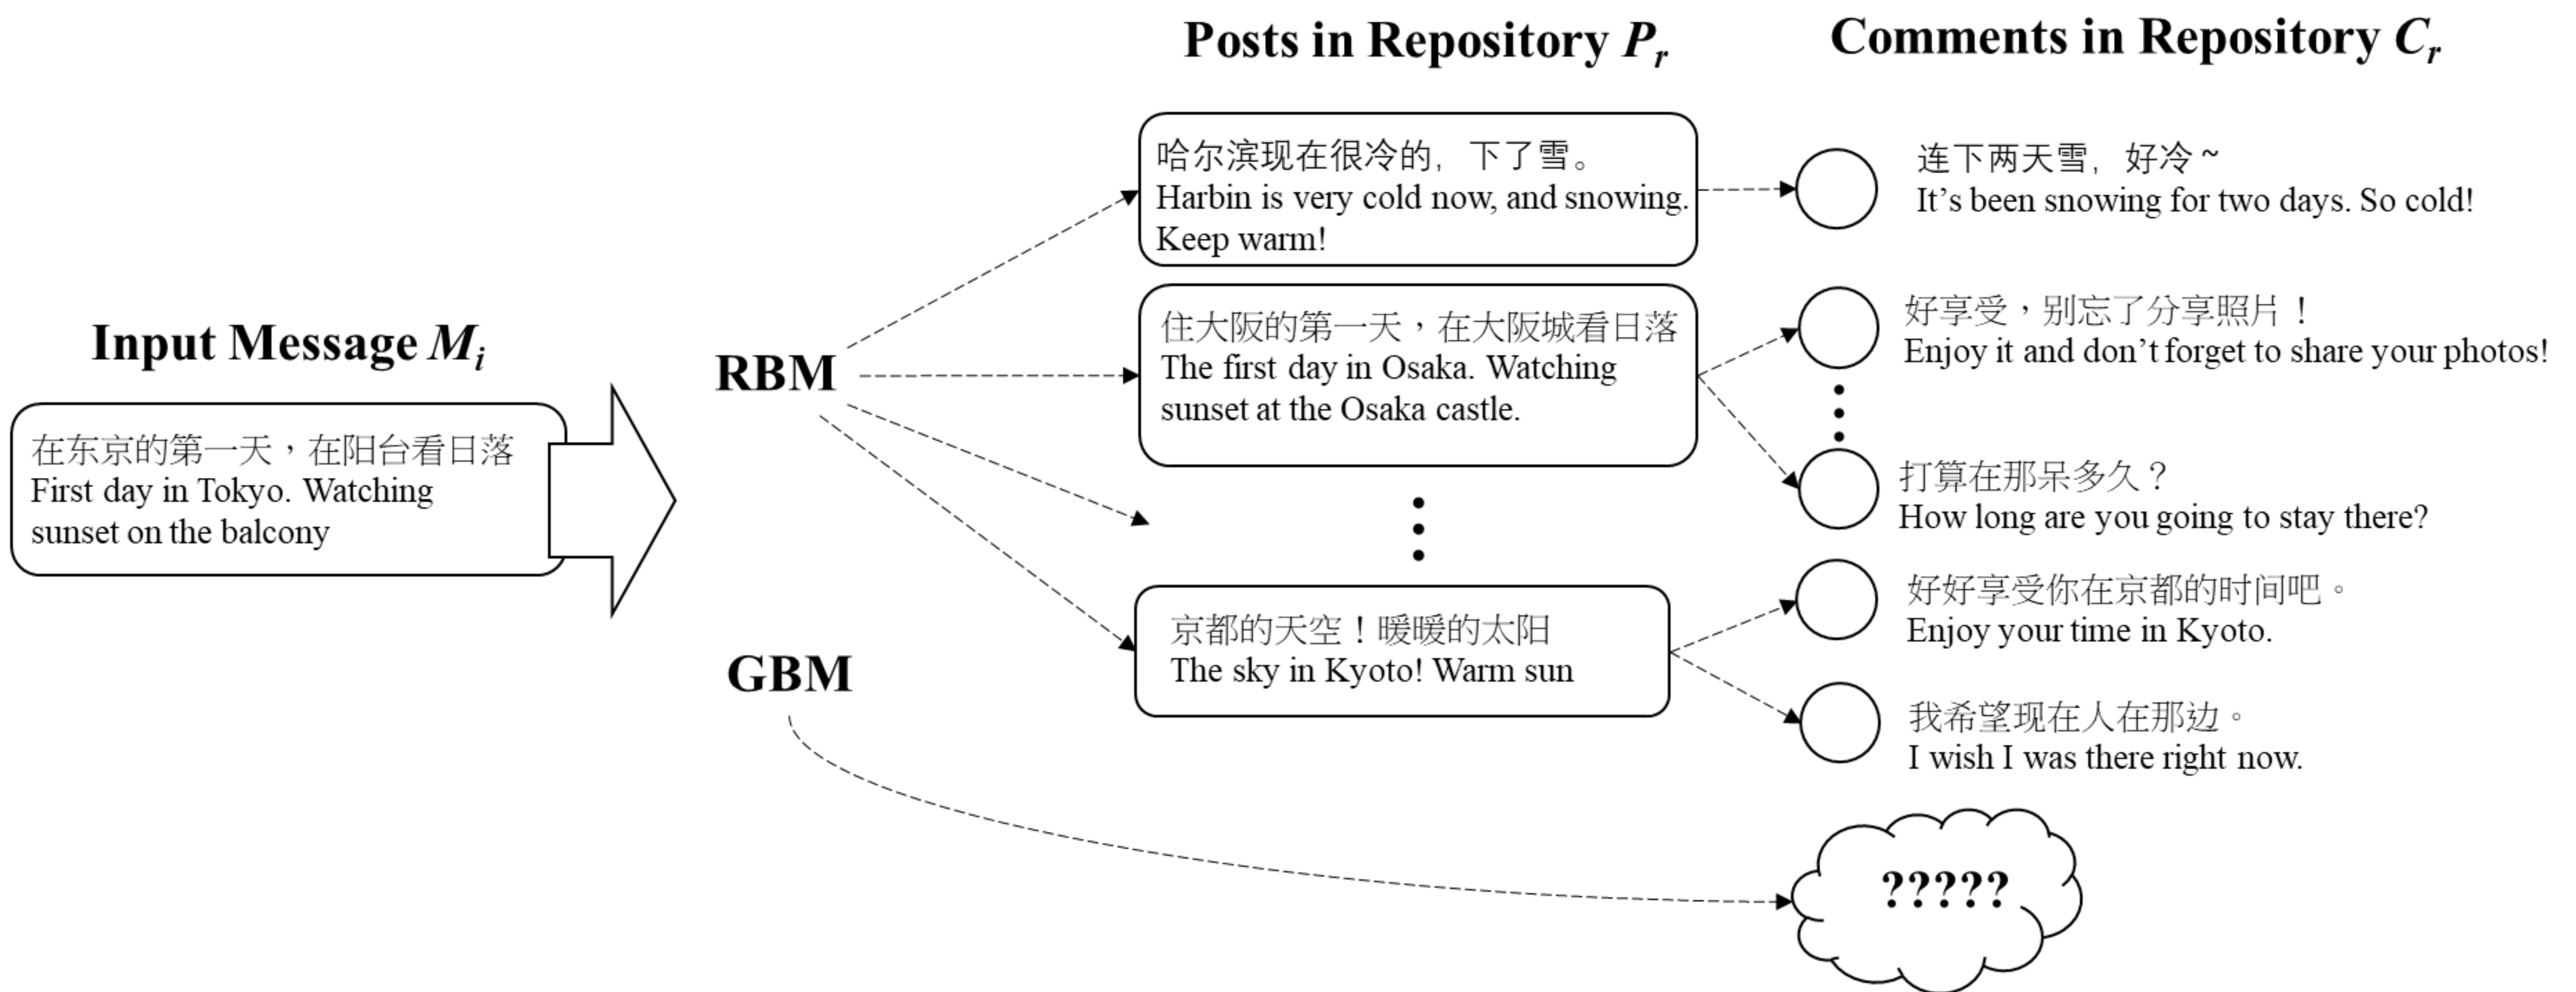

## System

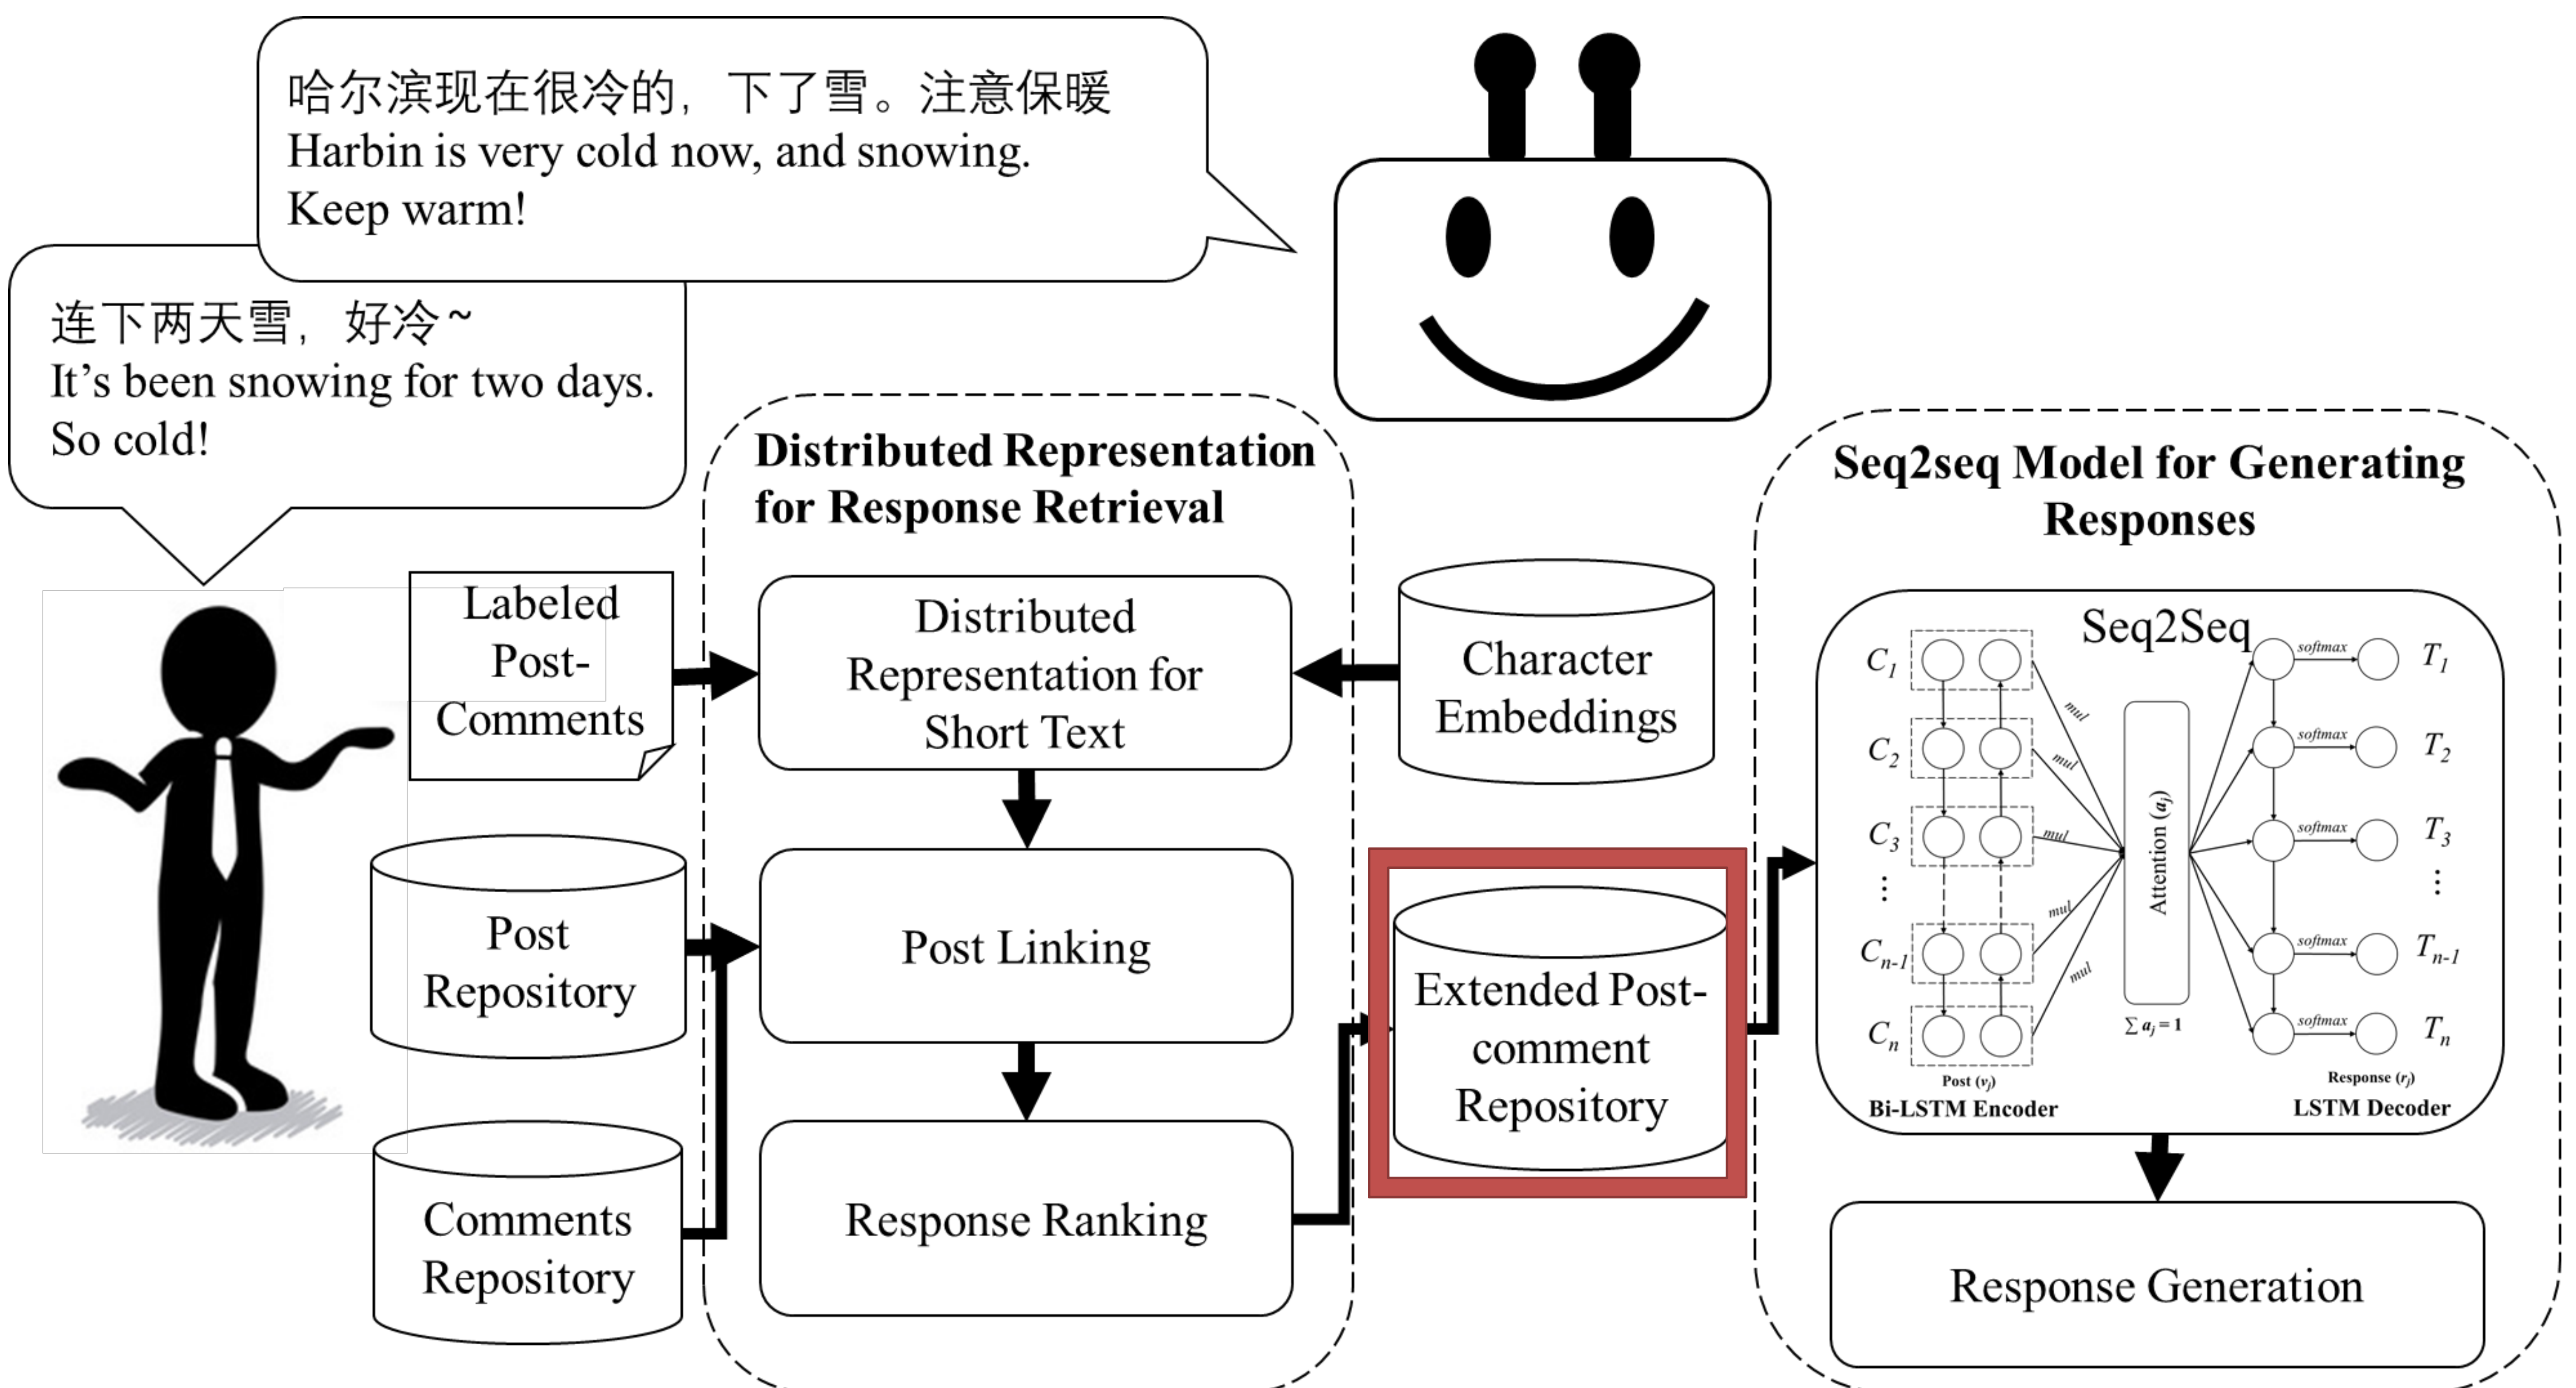

## Acknowledgement

This work was supported by grant MOST106-3114-E-001-002 and TMU106-AE1-B16 from the Ministry of Science and Technology in Taiwan and Taipei Medical University, respectively.